

## solar captor - Y de LYX

Below are the initial steps to set up the bulb depending on your needs.  
Then place Y of LYX on a dark surface with the solar panel down.



position for loading and programming

Unlock the device by pressing the control button ✨ for 8 seconds until it flashes once.

\*

Then press once to unlock.  
It will stay unlocked for 10 minutes before locking again to avoid unwanted changes.

### Change your settings.

You can now choose your preference (mode) below and follow the applicable steps.  
Use the command button to make your selection.

### \*\*IMPORTANT NOTE\*\*

**Do not press the button quickly.**

Wait for flashes between each press of the control button.


### GOOD TO KNOW :

SOLAR RECHARGE : Charging time 8 hours in optimal conditions.  
USB RECHARGE : Charging time 5 hours.

**AUTONOMY FROM 5H. TO 200H.**

### Why 1800° K and 2700° K ?

Between warm light ( 1800° K ) and amber light ( 2700° K ),  
Choose the light temperature best suited to your use  
by varying the lighting moods :  
On the other hand, lamps lit at 1800° K reduce the impact  
on nocturnal animals ( birds, turtoises, etc. )

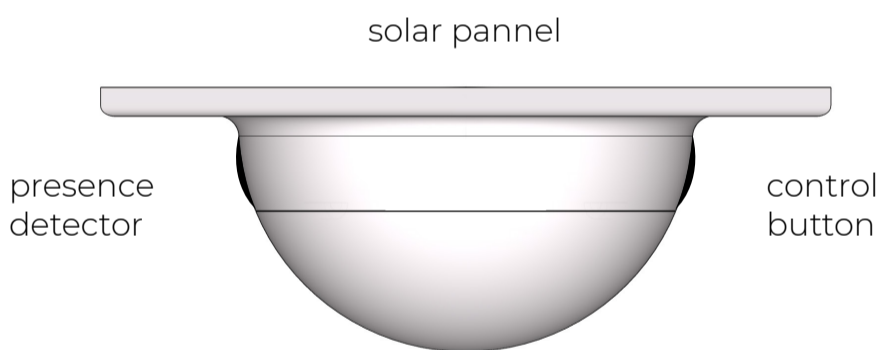

**Unlock the device by pressing the control button for 8 seconds until it flashes once.**

*Choose the most suitable lighting for your installation...*

### 1 / AUTOMATIC 2700° K :

Sunset start for 6 hours - Press once, \* ( 1 flash ).

### 2 / AUTOMATIC 1800° K :

Sunset start for 6 hours - Press two times, \*\* ( 2 flashes )

### 3 / AUTOMATIC with STANDBY 2700° K :

Start at sunset, standby at 50 lumens,  
500 lumens when triggered by motion sensor for 20 seconds.  
Press three times, \*\*\* ( 3 flashes ).

### 4 / AUTOMATIC with STANDBY 1800° K :

Starts at sunset, starts at 50 lumens,  
500 lumens when triggered by motion sensor for 20 seconds.  
Press four times, \*\*\*\* ( 4 flashes ).

### 5 / COMMANDED LIGHTING 2700° K :

5 levels of variable intensity 500/ 400/ 300/ 200/ 100 lumens.  
Press five times, \*\*\*\*\* ( 5 flashes ).  
Hold to choose a lighting level.

### 6 / COMMANDED LIGHTING 1800° K :

5 levels of variable intensity 500/ 400/ 300/ 200/ 100 lumens.  
Press six times, \*\*\*\*\* ( 6 flashes ).  
Hold to choose a lighting level.



**IP 67**

**RoHS**

**CE**